


Features

1. Compact,light,easy surface mounting
2. Autometed mounting and reflow soldering
3. High impedance and low loss
4. The products contain no lead and also support lead-free sol
- 5, All matrials ROHS compliance and use are UL listed



Application


1. Switching power supply
2. Computer products
3. DVD
4. DC-DC converter




Electrical characteristics

Model No.	Winding ratio Primary secondary	Inductance	secondary leakage inductance	DC Resistance at:25°C	Insulation withstand voltage	Test frequency voltage (KHz/V)
PQ2625T35L600	(6-4):(10.11-8.9)=35:6 (6-4):(3-1)=35:3	(6-4)=600uH±10%	50uH MAX (sec short)	(6-4)=220mΩ MAX (10.11-8.9)=23mΩ MAX (3-1)=70mΩ MAX	pri to sec AC 3.0KV/5mA 1SEC pri to core AC 1.0KV/5mA 1SEC sec to core AC 1.0KV/5mA 1SEC	1KHz/0.25V

Schematics(bottom)

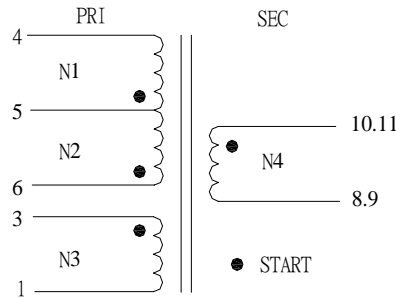

Shapes and dimensions unit: mm

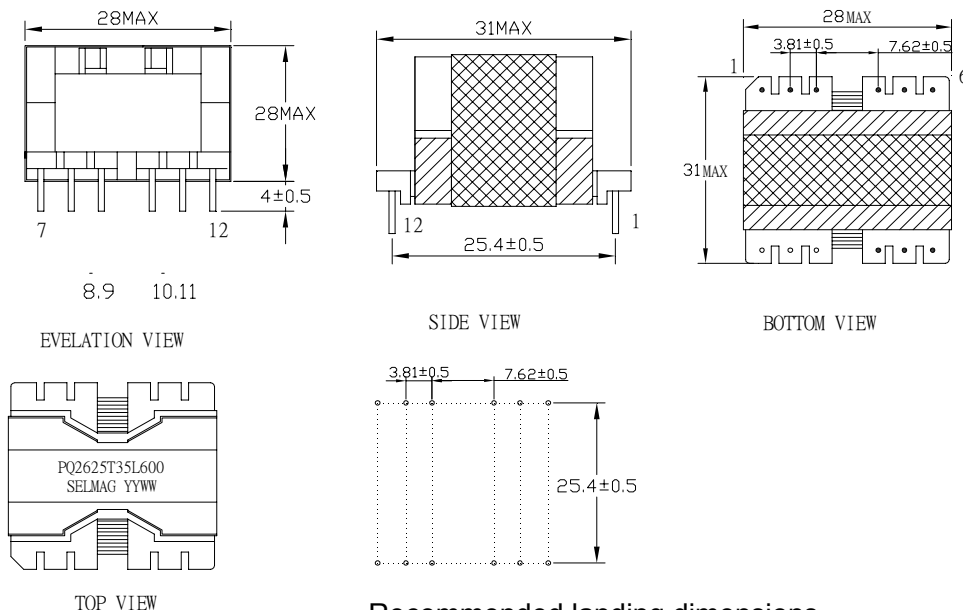

Recommended landing dimensions